



# ARTERIAL BLOCK WALL REPLACEMENT PERMIT APPLICATION CHECKLIST

## ARTERIAL BLOCK WALL REPLACEMENT PERMIT APPLICATION

Submittal requirements for Arterial Block Wall Replacement Permit Application are listed below. Please include the following items:

### 1) PLANNING APPLICATION: Arterial Block Wall Replacement Permit Application

- Complete all sections (incomplete applications will delay processing time)
- Include all required plans/drawings/calculations listed in the application
- Homeowner's signature required
- If property is located in a homeowners association, complete HOA Approval Form at [http://www.cerritos.us/RESIDENTS/\\_pdfs/hoa\\_approval\\_form.pdf](http://www.cerritos.us/RESIDENTS/_pdfs/hoa_approval_form.pdf)

If you have any questions, please call the Planning Division at (562) 916-1201.

### 2) BUILDING PERMIT APPLICATION

- Complete all sections (incomplete applications will delay processing time)
- Complete Declaration Form
  - If owner-builder, complete columns 1 and 3
  - If contractor, complete columns 2 and 3

If you have any questions, please call the Building & Safety Division at (562) 916-1209.

Submit forms together, with all required plans/drawings, at [https://cerritosca.seamlessdocs.com/f/Application\\_Plan\\_Submittal\\_Form](https://cerritosca.seamlessdocs.com/f/Application_Plan_Submittal_Form)

For more detailed information regarding the process for online submittal, please read the *Planning/Building Interim Electronic Submittal Procedure* at [http://www.cerritos.us/BUSINESSES/\\_pdfs/interim\\_electronic\\_submittal\\_procedure.pdf](http://www.cerritos.us/BUSINESSES/_pdfs/interim_electronic_submittal_procedure.pdf)

---

### 3) BUSINESS LICENSE REQUIREMENT

If you are a contractor, you must have a valid City of Cerritos business license. Please call the Business License Division at (562) 916-1236 to confirm active status or apply at [http://www.cerritos.us/BUSINESSES/business\\_licenses.php](http://www.cerritos.us/BUSINESSES/business_licenses.php)

For more detailed information regarding the process for online submittal, please read the *Business License Interim Electronic Submittal Procedure* at [http://www.cerritos.us/BUSINESSES/\\_pdfs/interim\\_business\\_license\\_procedure.pdf](http://www.cerritos.us/BUSINESSES/_pdfs/interim_business_license_procedure.pdf)

*The page is intentionally left blank.*



**ARTERIAL BLOCK WALL REPLACEMENT PERMIT APPLICATION**

**Please Type or Print**

An arterial block wall replacement permit is required for the repair and/or replacement of existing privately-owned block walls located adjacent to arterial streets within the City of Cerritos. All repaired or replaced block walls shall match the material finish and color of the existing arterial block wall. If only a portion of a block wall within a subject property is to be repaired or replaced, the new portion shall also match the height of the existing block wall.

AP# \_\_\_\_\_

Name of Homeowner: \_\_\_\_\_

Address of Job Site: \_\_\_\_\_

Assessor's Parcel Number (APN): \_\_\_\_\_

Phone Number: (        ) \_\_\_\_\_

Zoning (Check with City): RS-5000 \_\_\_\_\_ RS-6500 \_\_\_\_\_ Other \_\_\_\_\_

Name of Contractor: \_\_\_\_\_

Address of Contractor: \_\_\_\_\_

Phone Number: (        ) \_\_\_\_\_

State License #: \_\_\_\_\_ City Business License #: \_\_\_\_\_

**Existing Block Wall Conditions:**

Is the existing block wall located adjacent to an arterial street? Yes \_\_\_\_\_ No \_\_\_\_\_

Type of Block Wall Material:  Concrete Masonry  Slump  Split Face  Other

Wall Height (adjacent to an arterial street): Rear Yard: \_\_\_\_\_ Side Yard: \_\_\_\_\_

Nature of Work (check one): Repair \_\_\_\_\_ Replacement \_\_\_\_\_

Percentage (%) of block wall to be repaired or replaced\*: \_\_\_\_\_

**\*Please note that if the length of the repaired and/or replaced portion of the wall is less than 50% of the length of the wall segment within the subject property, a building permit shall not be required to be obtained concurrently with this application.**

Encroachment Permit Required? (see page 3-4 of application): Yes \_\_\_\_\_ No \_\_\_\_\_

**This section to be completed by homeowner:**

Initial each line below to acknowledge and declare as follows:

- \_\_\_ I declare, under penalty of making a false statement, that I have read and understand the statements and requirements of Chapter 22.22.700, "Site Development Standards," of the Cerritos Municipal Code, and will completely abide by them.
- \_\_\_ I shall repair or replace my existing block wall or fence in accordance with the City of Cerritos Municipal Code, all other applicable Code provisions, and the approved plans on which a permit was issued.
- \_\_\_ I understand that residential block walls are private property, and the maintenance and repair of the walls are the responsibility of the property owner for which the wall is located.
- \_\_\_ A violation of the statements and requirements of the Municipal Code, including the failure to obtain a wall permit prior to the construction of the wall, may constitute an infraction punishable pursuant to Section 1.08.020 of the Cerritos Municipal Code.
- \_\_\_ I understand that if an encroachment permit is required, I will be responsible for the restoration or proper repair of the adjacent sidewalk and/or other publicly owned improvements damaged during block wall construction on my subject property.
- \_\_\_ I understand that if I repair or replace a portion of the block wall on my subject property that is on or over the common property line of my neighbor, I will be required to obtain the adjacent neighbor's authorization by means of a Common Property Line Agreement.
- \_\_\_ I understand that if I choose to use City-provided block wall plans, I will be required to complete and sign a general release and waiver of claims, thereby acknowledging and agreeing to release and hold harmless the City of Cerritos from using said details.

Homeowner's Signature\* \_\_\_\_\_ Date \_\_\_\_\_

Contractor's Signature \_\_\_\_\_ Date \_\_\_\_\_

**\*Application must be signed by the homeowner prior to submittal to the City.**

-----  
(This section to be completed by staff)

**Community Development Approval:**

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

Print Name/Title: \_\_\_\_\_

**Public Works Approval (if an encroachment permit is necessary):**

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

Print Name/Title: \_\_\_\_\_

<b>ENCROACHMENT PERMIT REQUIREMENTS</b>
---

**The following wall construction shall also require an encroachment permit and shall be subject to inspection by the Public Works Department:**

- New, repaired, or replaced block walls with a below-grade footing that encroaches into the public right-of-way
- Repaired or replaced above-grade portions of existing arterial block walls that already encroach into the public right-of-way
- All wall construction that temporarily occupies a portion of the public right-of-way during the construction process.

Please note that, except for existing encroachments, in no instance shall any portion of a block wall above the grade of the adjacent public sidewalk be permitted to encroach into the public right-of-way.

**If an encroachment permit is necessary for the repair or replacement of an existing block wall, please fill out the encroachment permit application on the next page.**

## APPLICATION FOR EXCAVATION - ENCROACHMENT PERMIT

<b>CITY OF CERRITOS</b>			<b>PERMIT NO.</b>		
<b>PUBLIC SERVICES DEPARTMENT</b>			ISSUED BY		DATE ISSUED
48 HOURS NOTICE REQUIRED FOR ALL INSPECTIONS			<b>THIS PERMIT OR CERTIFIED COPY MUST BE KEPT ON THE JOB SITE TO BE SHOWN TO ANY AUTHORIZED AGENT OF THE CITY ON REQUEST.</b>		
<b>FOR THE APPLICANT TO FILL IN</b>					
JOB LOCATION			DESCRIPTION OF WORK		SPECIAL DEPOSIT
PERMITTEE			SIDEWALK		\$
MAIL ADDRESS			CURB & GUTTER		\$
CITY			A.C. PAVEMENT		\$
STATE LIC. NO.			DRIVEWAY		\$
CITY LIC. NO.			CURB DRAIN		\$
OWNER			TREE		\$
ADDRESS			TRASH BIN		\$
TEL. NO.			OTHER		\$
<b>SPECIAL REQUIREMENTS</b>			TOTAL		\$
SEE ATTACHED.			RECEIPT NO.		
<b>DESCRIPTION OF WORK</b>			RETURN DEPOSIT TO:		
			<b>APPROVAL FOR RELEASE</b>		
STARTING DATE		EST. DATE OF COMPLETION	INSPECTOR'S SIGNATURE		DATE

1. **NOTIFICATION:** The contractor shall have applied for and received an excavation/encroachment permit after which the Contractor shall notify the City Inspector a minimum of 48 hours prior to the start of construction. All material furnished and all work done shall be inspected by the City Engineer or his designated representative and shall conform to the Standard Drawings and Specifications of the City of Cerritos and the Standard Specifications for Public Works Construction. No work is to be performed beyond the normal 40 hour work week unless the City will provide inspection.
2. The Contractor shall contact the City and Underground Service Alert (USA) (800-422-4133) 48 hours before the excavation or work within the public right of way. Contractor will provide evidence to the City in the form of an inquiry identification number that Contractor has notified USA.
3. Any material or work installed or constructed without notification to USA & City Inspector shall be subject to removal.
4. For inspection, Call (562) 916-1219.
5. USA Ticket # \_\_\_\_\_  To be provided.
6. **Insurance:**
  1. Worker's Compensation and Employer's Liability as required by statute.
  2. General and Automobile Liability: \$1,000,000 per occurrence, naming the City of Cerritos "Additional Insured".

**CONDITIONS IMPOSED:** Excavation, slurry backfill and finish surface are to be in accordance with City standards. Traffic warning devices shall be placed in accordance with the WATCH Manual and be maintained at all times. **NO OPEN TRENCHING WILL BE PERMITTED WITHOUT PRIOR APPROVAL FROM THE DEPUTY CITY MANAGER - PUBLIC WORKS.**

**APPLICANT AGREES TO INDEMNIFY, DEFEND AND HOLD HARMLESS THE CITY, ITS OFFICERS, AGENTS AND EMPLOYEES FROM AND AGAINST ANY AND ALL CLAIMS, EXPENSES, LOSSES OR DEMANDS, INCLUDING COSTS AND ATTORNEY'S FEES BY REASON OF ANY CLAIMS ARISING OUT OF OR IN CONNECTION WITH THE PERFORMANCE OF APPLICANTS' OR APPLICANT'S SUBCONTRACTOR'S WORK.**

Permittee's Signature and Title \_\_\_\_\_

Date \_\_\_\_\_

## INFORMATION REQUIRED FOR AN ARTERIAL BLOCK WALL REPLACEMENT PERMIT

1. **Plot plan** of the entire lot including the subject residence, adjacent residences and locations of existing and proposed walls.
2. **Structural Plans** are required for block walls over thirty (30) inches in height (two copies-see attached examples).

**Note:** The pre-approved structural plans are provided by the City of Cerritos as an approved design for block walls. The examples are provided to serve as guidelines and stipulate minimum requirements for the construction of block walls regarding foundation, structural reinforcement, and grouting, and may be used in lieu of hiring an engineer for structural calculations. Walls shall not be required to be limited to this design; however, any alternative design must receive approval from the Cerritos Building and Safety Division.

3. **Common Property Line Agreement** is required for walls proposed on common property lines. The agreement must be signed by the affected adjacent property owners.

**Note:** If approval from adjacent property owner(s) is not possible, the wall/fence may be built within the subject property provided that a land survey signed by a Land Surveyor licensed in the State of California is submitted along with the wall/fence plan and provided that the wall/fence, including the foundation, is constructed entirely on the subject property.

4. **Submit the above information, and the Homeowners Association approval if applicable,** to the City of Cerritos, Community Development Department for review.

## ARTERIAL BLOCK WALL DEVELOPMENT STANDARDS

Pursuant to the statements and requirements of the Cerritos Municipal Code (Chapter 22.22.700 -Site Development Standards) and the Cerritos Block Wall Repair and Replacement Policy, the following regulations shall apply to block walls located along an arterial street:

- All construction, including repair or replacement, of block walls shall require approval from the Department of Community Development.
- All repaired or replaced block walls shall match the material finish and color of the existing arterial block wall.
- A solid block wall constructed along the perimeter of a residential subdivision shall be a minimum height of six feet six inches (6'-6") and a maximum height of eight (8) feet, as measured from the ground level of the adjacent public right-of-way or sidewalk.
- If only a portion of the wall is replaced, then the replaced portion shall have a height that matches the remaining existing wall.
- No wall extensions are permitted along the perimeter of a residential subdivision adjacent to an arterial street.
- Four-inch (4") thick block is prohibited.

- Where a thicker block is constructed adjacent to an existing 4" block wall, the portion of the wall facing a public street shall be aligned flush with the face of the existing block wall, such that there is no visible jog in the wall. The thicker portion of the new block shall extend into the subject property.

Copies of Cerritos Municipal Code regulations/Cerritos Block Wall Repair and Replacement Policy may be obtained from the Department of Community Development. Additionally, the Cerritos Municipal Code can be viewed online at [www.codepublishing.com/ca/cerritos.html](http://www.codepublishing.com/ca/cerritos.html).





**COMMON PROPERTY LINE AGREEMENT – SIGNATURE OF AUTHORIZATION (S)**

This agreement, by the following property owners, gives permission to construct a wall on or over the common property line without restrictions.

**Subject Property (Site of Block Wall Construction):**

Street Address: \_\_\_\_\_

Homeowner's Signature: \_\_\_\_\_

Print Name: \_\_\_\_\_

**Adjacent Property #1:**

Street Address: \_\_\_\_\_

Homeowner's Signature: \_\_\_\_\_


Print Name: \_\_\_\_\_

**Adjacent Property #2:**

Street Address: \_\_\_\_\_

Homeowner's Signature: \_\_\_\_\_

Print Name: \_\_\_\_\_

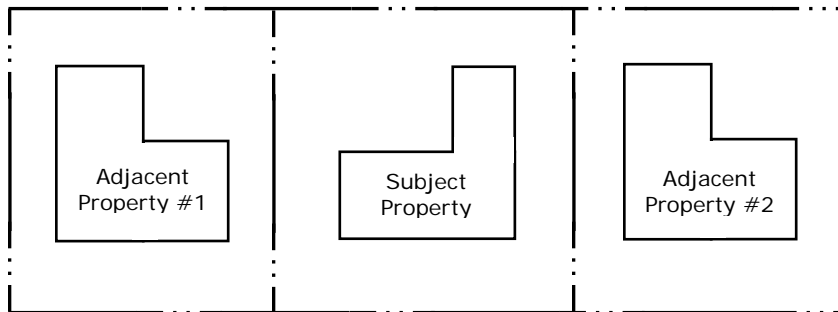

# **City of Cerritos Approved Block Wall Details**



**Adopted on January 29, 2009**

**GENERAL RELEASE AND WAIVER OF CLAIMS**

This general release and waiver of claims ("RELEASE") is entered into by the property owner and user of the wall plans ("WALL PLANS") described below.

The WALL PLANS are standard block wall plans provided as a courtesy by the City of Cerritos ("City") and attached to this RELEASE.

By signing this RELEASE, I certify that I am the user of the WALL PLANS and I agree with and understand the following provisions of this RELEASE:

I understand that the WALL PLANS provided by the City of Cerritos are a pre-approved design for block walls.

I understand that four-inch (4") thick block is prohibited, and I will not employ the use of 4"-thick block.

I understand that I am not required to use nor am I limited to the use of the WALL PLANS for the design of my wall. I further understand that any alternative wall design must receive approval from the City.


**I hereby acknowledge and agree to release and hold harmless the City of Cerritos, and each of its officers, agents, and employees, from liability of whatsoever nature or form based on any misuse of or any construction defect, problem, complication or cost that results from the use of the WALL PLANS. I further acknowledge and agree to release and hold harmless the City of Cerritos, and each of its officers, agents, and employees, from any and all claims, suits, losses, liabilities, injuries, damages, expenses, and costs of any kind or nature, arising out of or in any way connected with the use of the WALL PLANS.**

I understand that use of the WALL PLANS described above is only permitted after signing this RELEASE.

Dated: \_\_\_\_\_

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Print Name

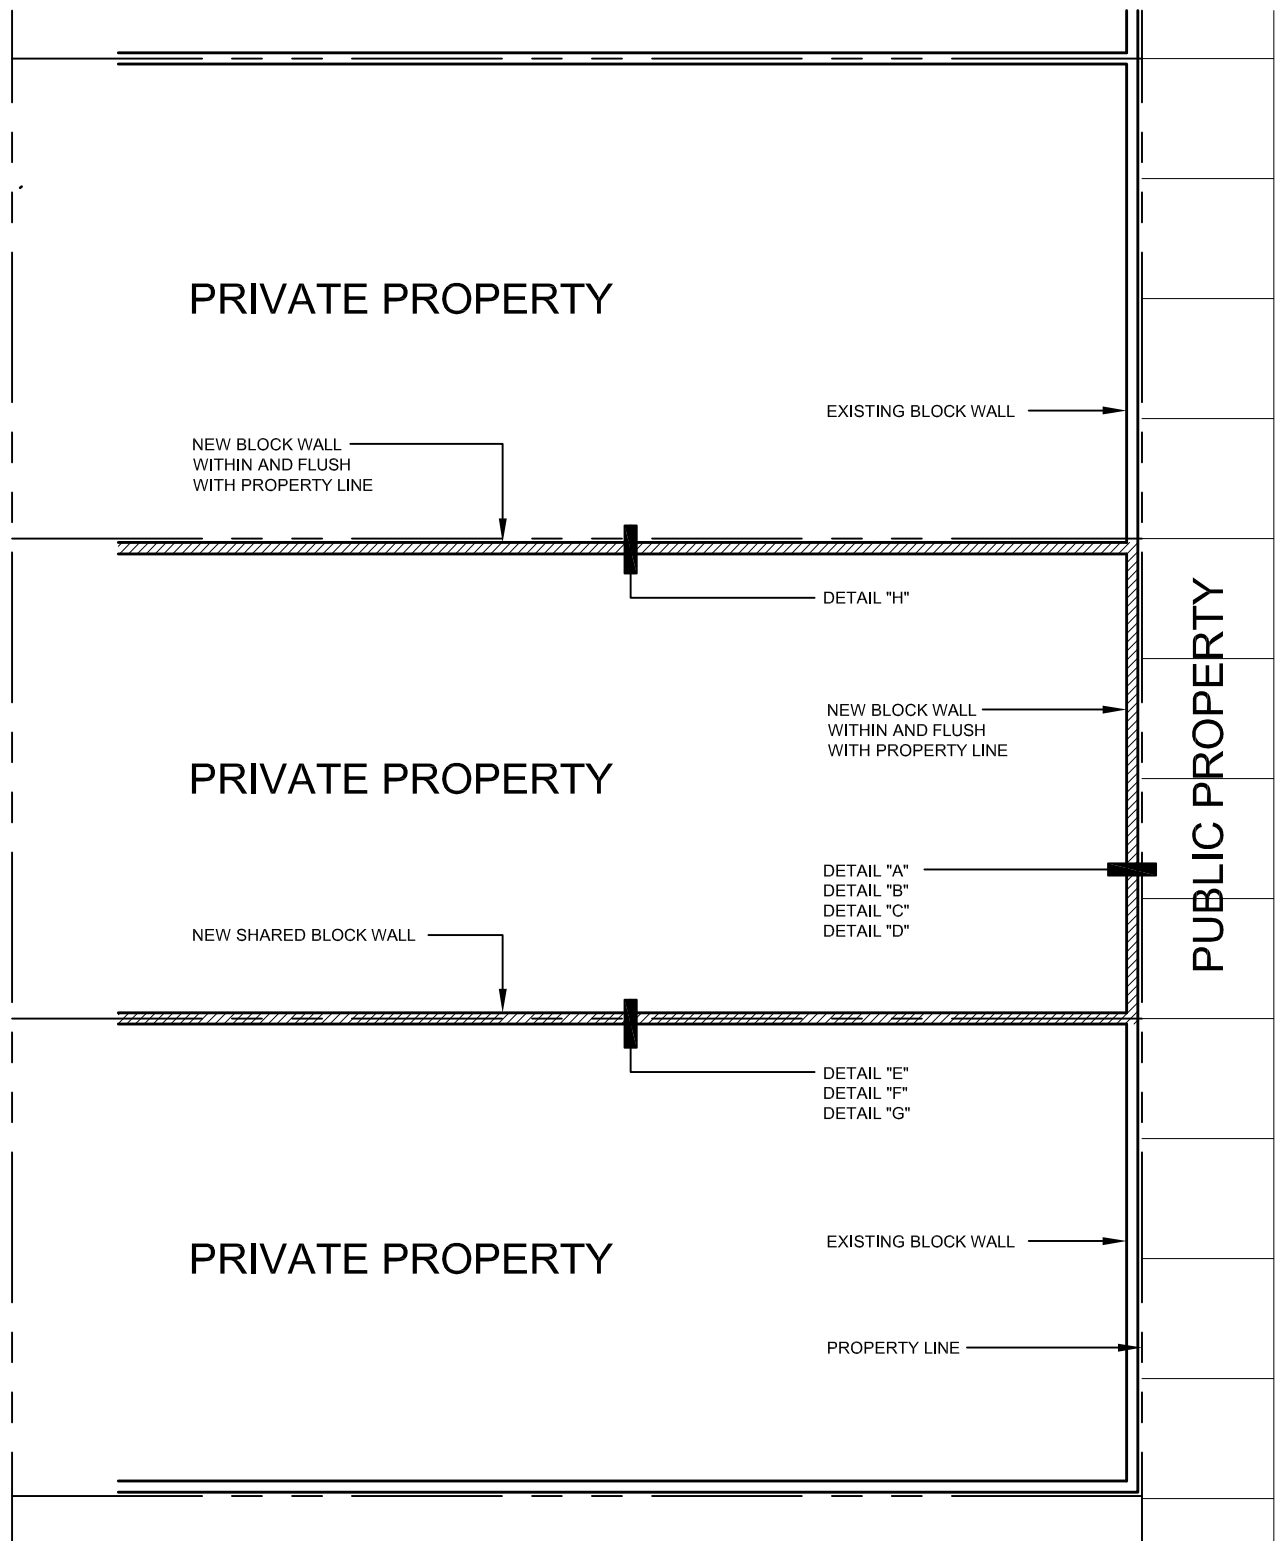

PRIVATE PROPERTY

PRIVATE PROPERTY

PRIVATE PROPERTY

PUBLIC PROPERTY

NEW BLOCK WALL  
WITHIN AND FLUSH  
WITH PROPERTY LINE

EXISTING BLOCK WALL

DETAIL "H"

NEW BLOCK WALL  
WITHIN AND FLUSH  
WITH PROPERTY LINE

DETAIL "A"  
DETAIL "B"  
DETAIL "C"  
DETAIL "D"

NEW SHARED BLOCK WALL

DETAIL "E"  
DETAIL "F"  
DETAIL "G"

EXISTING BLOCK WALL

PROPERTY LINE

NO SCALE

PL (PROPERTY LINE)  
PUBLIC R.O.W. SUBJECT PROPERTY


(H) WALL HEIGHT	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
84"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL 2 #4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.
108"	#4 REBAR @ 16" O.C.	#4 CONTINUOUS AT TOP OF WALL 2 #4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.

SPECIFICATIONS:

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

NOTES:

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. An encroachment permit issued by the City of Cerritos shall be required for any portion of the footing that encroaches into the public right-of-way. In no instance shall any portion of the block wall above grade of the adjacent public sidewalk be permitted to encroach into the public right-of-way.
10. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
11. Updated in January 2009 pursuant to the 2008 Los Angeles County Building Code.

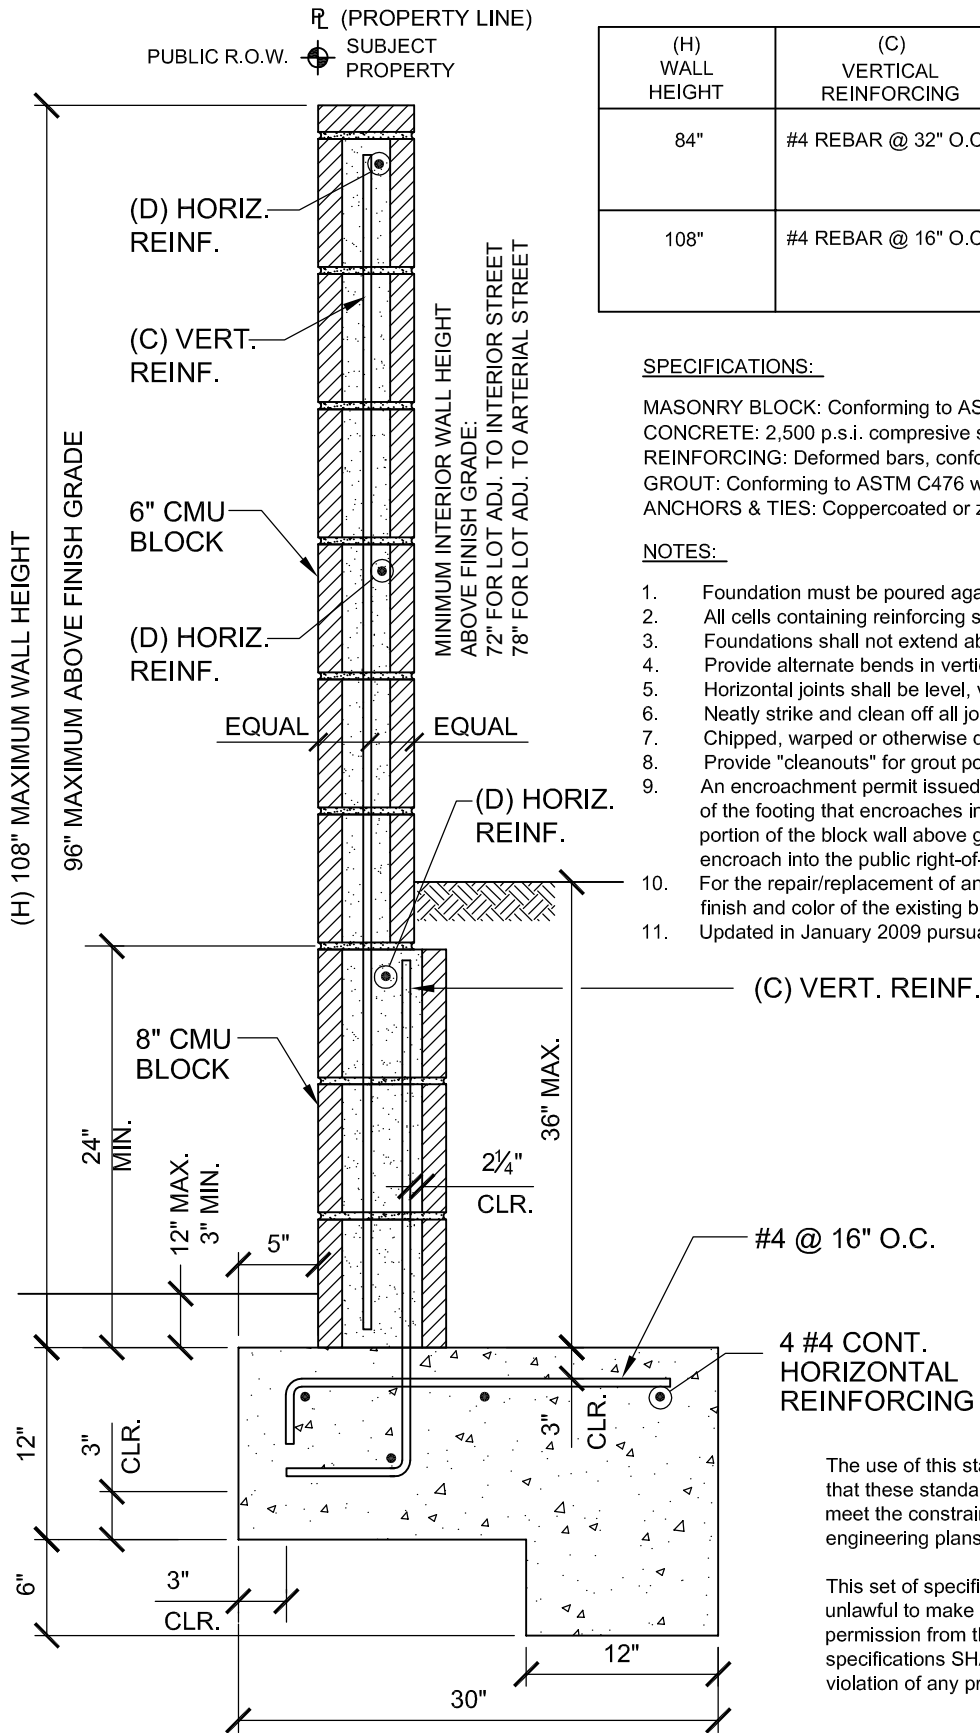

(C) VERT. REINF.

#4 @ 16" O.C.

4 #4 CONT. HORIZONTAL REINFORCING


The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.

City of Cerritos Standard Wall Detail "A"  
 Retaining Condition, Adjacent to Public Right-of-Way  
 L-Footing, 96" Above Grade w/ 36" Maximum Retention

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

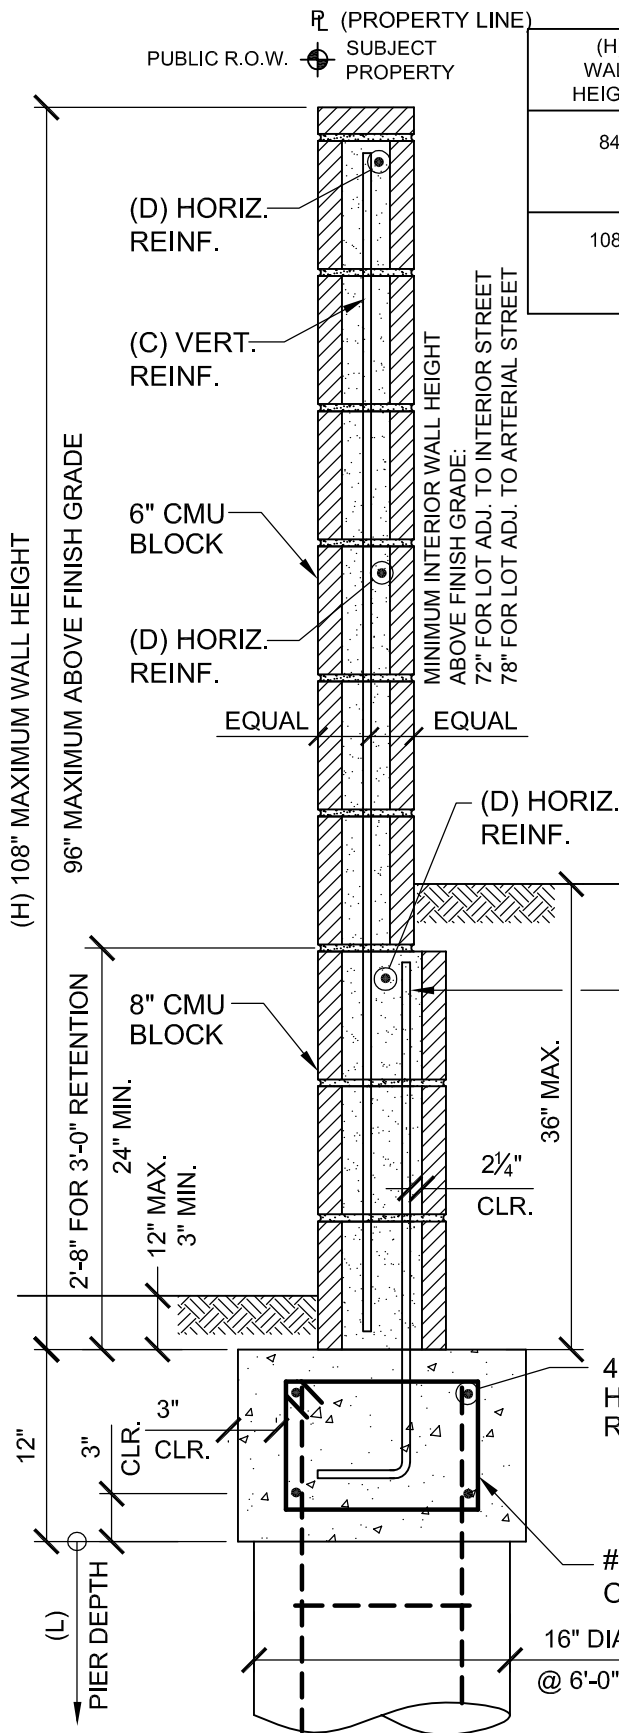


(H) WALL HEIGHT	(L) PIER DEPTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
84"	66"	#4 FOOTING DOWELS @ 24" O.C. AND #4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.
108"	74"	#5 FOOTING DOWELS @ 24" O.C. AND #4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.

**SPECIFICATIONS:**

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. An encroachment permit issued by the City of Cerritos shall be required for any portion of the footing that encroaches into the public right-of-way. In no instance shall any portion of the block wall above grade of the adjacent public sidewalk be permitted to encroach into the public right-of-way.
10. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
11. Updated in January 2009 pursuant to the 2008 Los Angeles County Building Code.

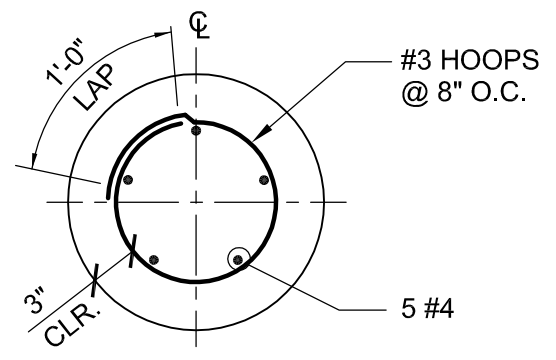

**PIER SECTION**



The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.


City of Cerritos Standard Wall Detail "B"  
 Retaining Condition, Adjacent to Public Right-of-Way  
 Pier-Footing, 96" Above Grade w/ 36" Maximum Retention

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

PUBLIC R.O.W.  SUBJ. PROP. 

(H) WALL HEIGHT	(A) FOUNDATION DEPTH	(B) FOUNDATION WIDTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
30"	12"	14"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
36"	12"	14"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
48"	12"	20"	#3 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
60"	12"	24"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
72"	12"	27"	#4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL 3#4 CONTINUOUS AT FOUNDATION
96"	12"	30"	#6 REBAR @ 16" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDHEIGHT OF WALL 3#4 CONTINUOUS AT FOUNDATION
108"	12"	30"	#7 REBAR @ 8" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDHEIGHT OF WALL 3#4 CONTINUOUS AT FOUNDATION

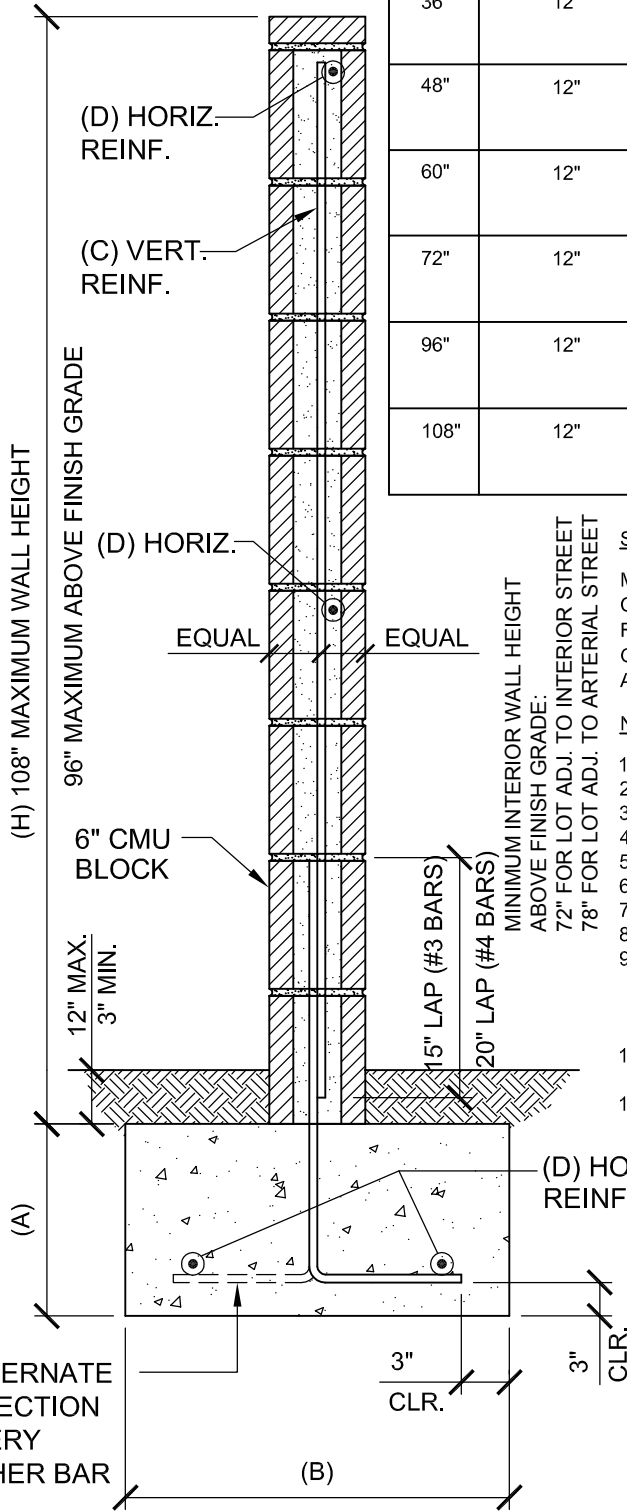

**SPECIFICATIONS:**

- MASONRY BLOCK: Conforming to ASTM C90.
- CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.
- REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.
- GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.
- ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

- Foundation must be poured against undisturbed soil.
- All cells containing reinforcing steel shall be solid grouted.
- Foundations shall not extend above finish grade.
- Provide alternate bends in vertical reinforcing.
- Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
- Neatly strike and clean off all joints in the face of walls which are not to be plastered.
- Chipped, warped or otherwise defective masonry units shall not be used in finish work.
- Provide "cleanouts" for grout pours > 48" high.
- An encroachment permit issued by the City of Cerritos shall be required for any portion of the footing that encroaches into the public right-of-way. In no instance shall any portion of the block wall above grade of the adjacent public sidewalk be permitted to encroach into the public right-of-way.
- For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
- Updated in January 2009 pursuant to the 2008 Los Angeles County Building Code.



The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.


City of Cerritos Standard Wall Detail "C"  
Non-Retaining, Free Standing Condition, Adjacent to Public Right-of-Way  
T-Footing, 30" to 96" Above Grade

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
BUILDING AND SAFETY DIVISION  
18125 BLOOMFIELD AVENUE  
CERRITOS, CA 90703  
PHONE: 562.916.1209

 (PROPERTY LINE)  
 PUBLIC R.O.W.  SUBJECT PROP.

(H) WALL HEIGHT	(A) FOUNDATION DEPTH	(B) FOUNDATION WIDTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
30"	21"	12"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDGEIGHT OF WALL #4 CONT. TOP & BOT. AT FOUNDATION
36"	23"	12"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDGEIGHT OF WALL #4 CONT. TOP & BOT. AT FOUNDATION
48"	26"	12"	#3 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDGEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
60"	29"	12"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDGEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
72"	33"	12"	#4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDGEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
96"	46"	20"	#6 REBAR @ 16" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDGEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
108"	65"	20"	#7 REBAR @ 8" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDGEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION

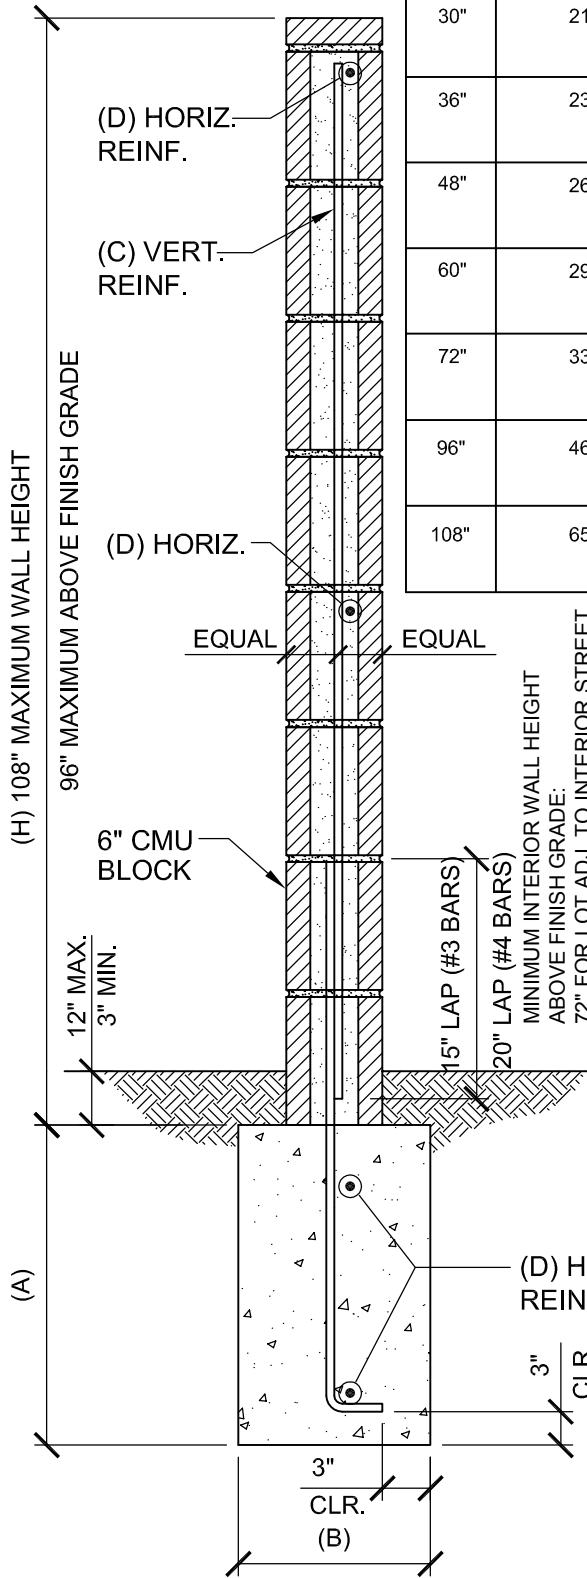

**SPECIFICATIONS:**

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. An encroachment permit issued by the City of Cerritos shall be required for any portion of the footing that encroaches into the public right-of-way. In no instance shall any portion of the block wall above grade of the adjacent public sidewalk be permitted to encroach into the public right-of-way.
10. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
11. Updated in January 2009 pursuant to the 2008 Los Angeles County Building Code.

The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.

**City of Cerritos Standard Wall Detail "D"**  
**Non-Retaining, Free Standing Condition, Adjacent to Public Right-of-Way**  
**I-Footing, 30" to 96" Above Grade**


SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209



PL (PROPERTY LINE)  
 SUBJECT PROPERTY 1      SUBJECT PROPERTY 2

(H) WALL HEIGHT	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
84"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL 2#4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.

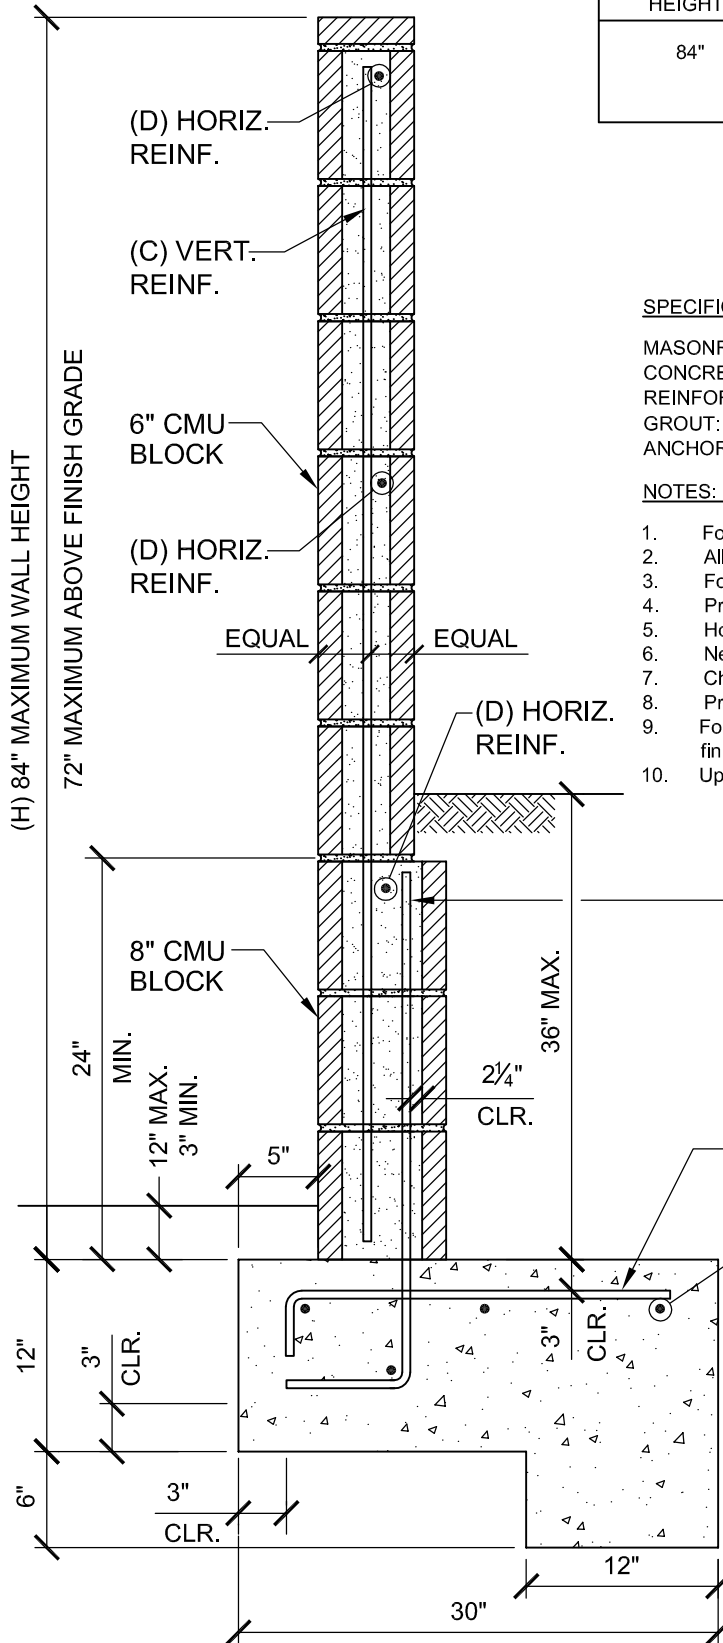

**SPECIFICATIONS:**

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
10. Updated in January 2009 Pursuant to the 2008 Los Angeles County Building Code.

The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.


**City of Cerritos Standard Wall Detail "E"**  
 Retaining Condition, Between Two Private Properties  
 L-Footing, 72" Above Grade w/ 36" Maximum Retention

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

(PROPERTY LINE)  $\overline{P}$   
 SUBJECT PROPERTY 1  $\ominus$  SUBJECT PROPERTY 2

(H) WALL HEIGHT	(L) PIER DEPTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
84"	66"	#4 FOOTING DOWELS @ 24" O.C. AND #4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #2#4 CONTINUOUS AT MIDHEIGHT OF WALL @ 24" O.C.

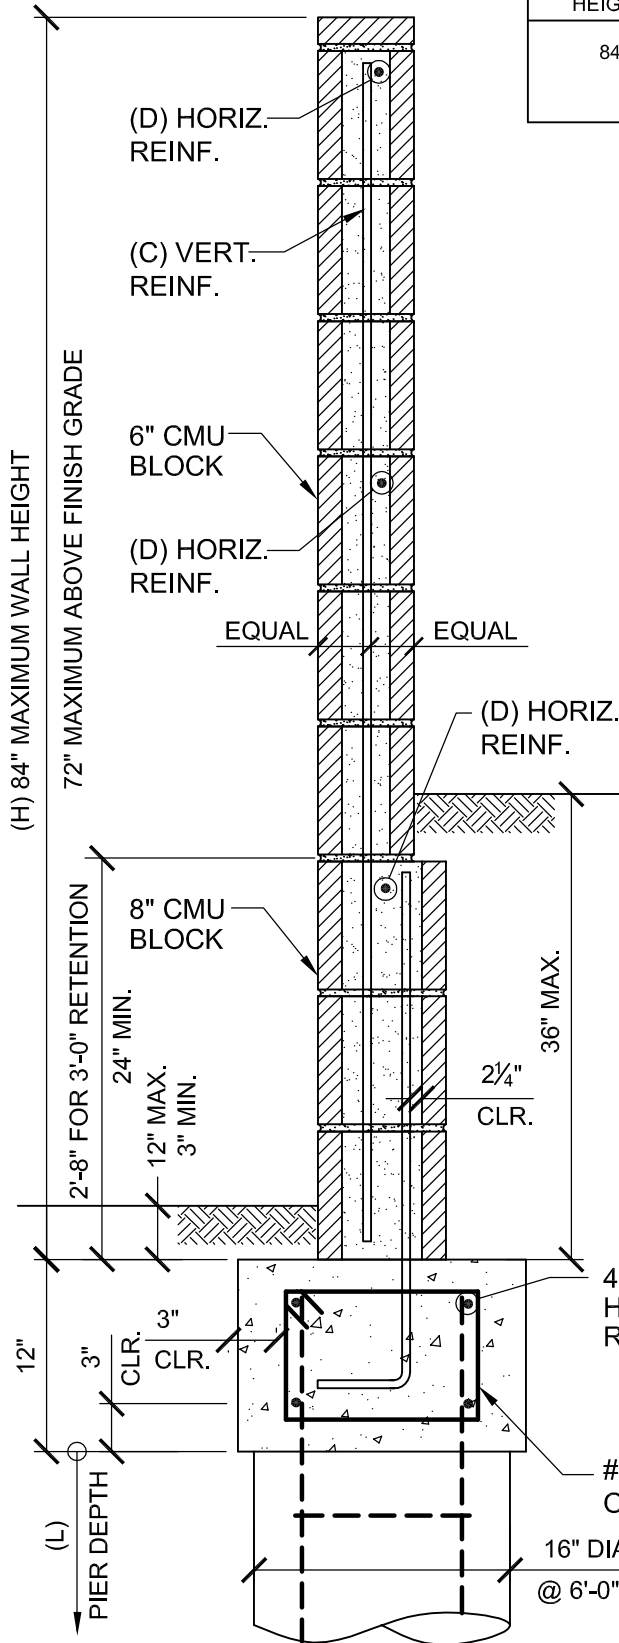


**SPECIFICATIONS:**

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
10. Updated in January 2009 Pursuant to the 2008 Los Angeles County Building Code.

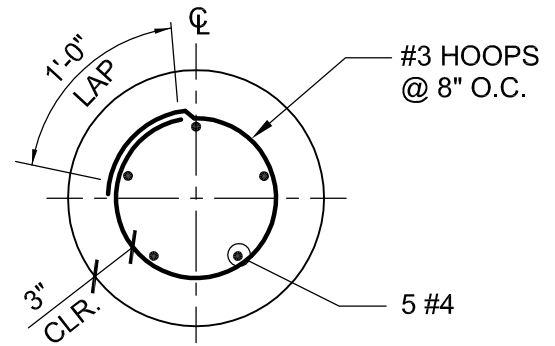

**PIER SECTION**

The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.


This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.

City of Cerritos Standard Wall Detail "F"  
 Retaining Condition, Between Two Private Properties  
 Pier-Footing, 72" Above Grade w/ 36" Maximum Retention

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

(PROPERTY LINE)  $\bar{P}$   
 SUBJECT PROPERTY 1  $\odot$  SUBJECT PROPERTY 2

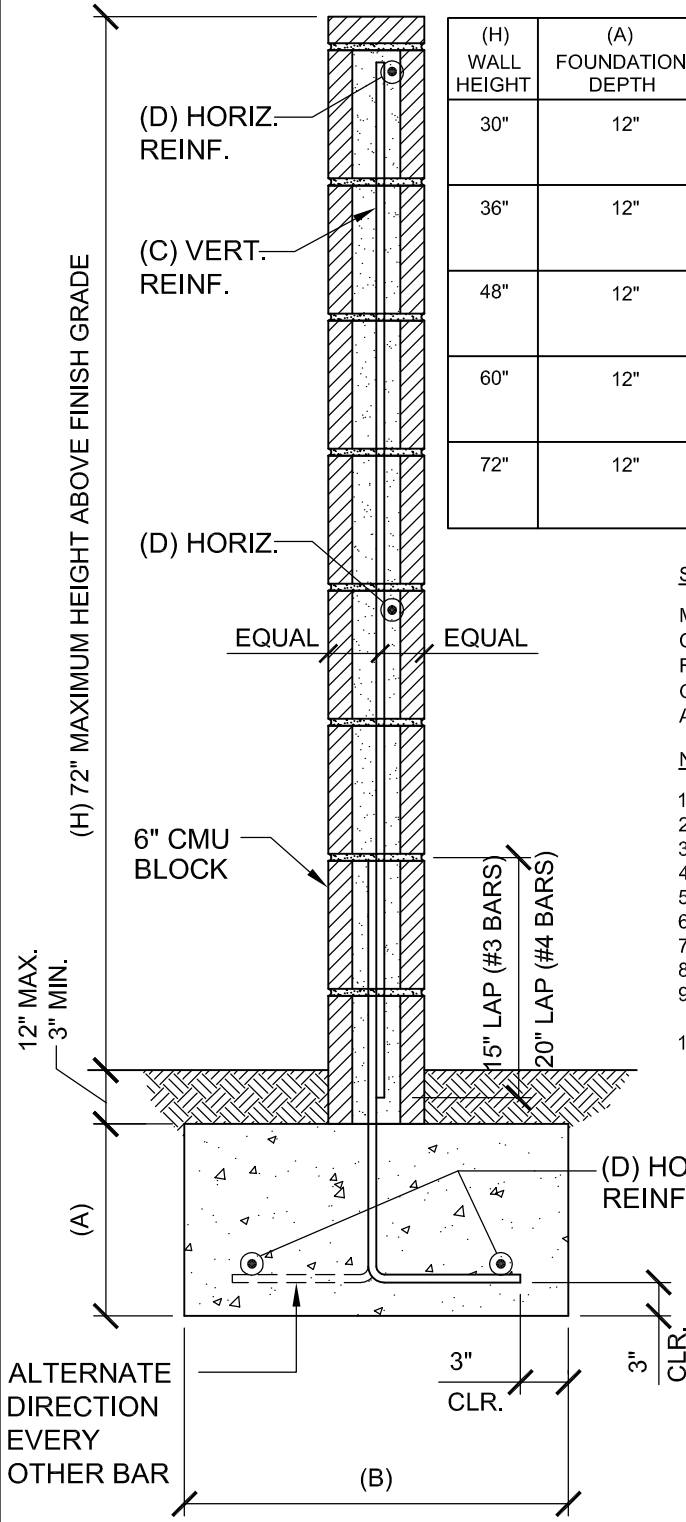

(H) WALL HEIGHT	(A) FOUNDATION DEPTH	(B) FOUNDATION WIDTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
30"	12"	14"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
36"	12"	14"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
48"	12"	20"	#3 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
60"	12"	24"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL 2#4 CONTINUOUS AT FOUNDATION
72"	12"	27"	#4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL 3#4 CONTINUOUS AT FOUNDATION

**SPECIFICATIONS:**

- MASONRY BLOCK: Conforming to ASTM C90.
- CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.
- REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.
- GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.
- ANCHORS & TIES: Coppercoated or zinc-coated steel.

**NOTES:**

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
10. Updated in January 2009 Pursuant to the 2008 Los Angeles County Building Code.

The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.


**City of Cerritos Standard Wall Detail "G"**  
 Non-Retaining, Free Standing Condition, Between Two Private Properties  
 T-Footing, 30" to 72" Above Grade

SCALE: 1" = 1'-0"

CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

(PROPERTY LINE)  $\perp$   
 SUBJECT PROPERTY 1  $\bullet$  SUBJECT PROPERTY 2

(H) WALL HEIGHT	(A) FOUNDATION DEPTH	(B) FOUNDATION WIDTH	(C) VERTICAL REINFORCING	(D) HORIZONTAL REINFORCING
30"	21"	12"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL #4 CONT. TOP & BOT. AT FOUNDATION
36"	23"	12"	#3 REBAR @ 24" O.C.	#3 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL #4 CONT. TOP & BOT. AT FOUNDATION
48"	26"	12"	#3 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #3 CONTINUOUS AT MIDHEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
60"	29"	12"	#4 REBAR @ 32" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION
72"	33"	12"	#4 REBAR @ 24" O.C.	#4 CONTINUOUS AT TOP OF WALL #4 CONTINUOUS AT MIDHEIGHT OF WALL #5 CONT. TOP & BOT. AT FOUNDATION

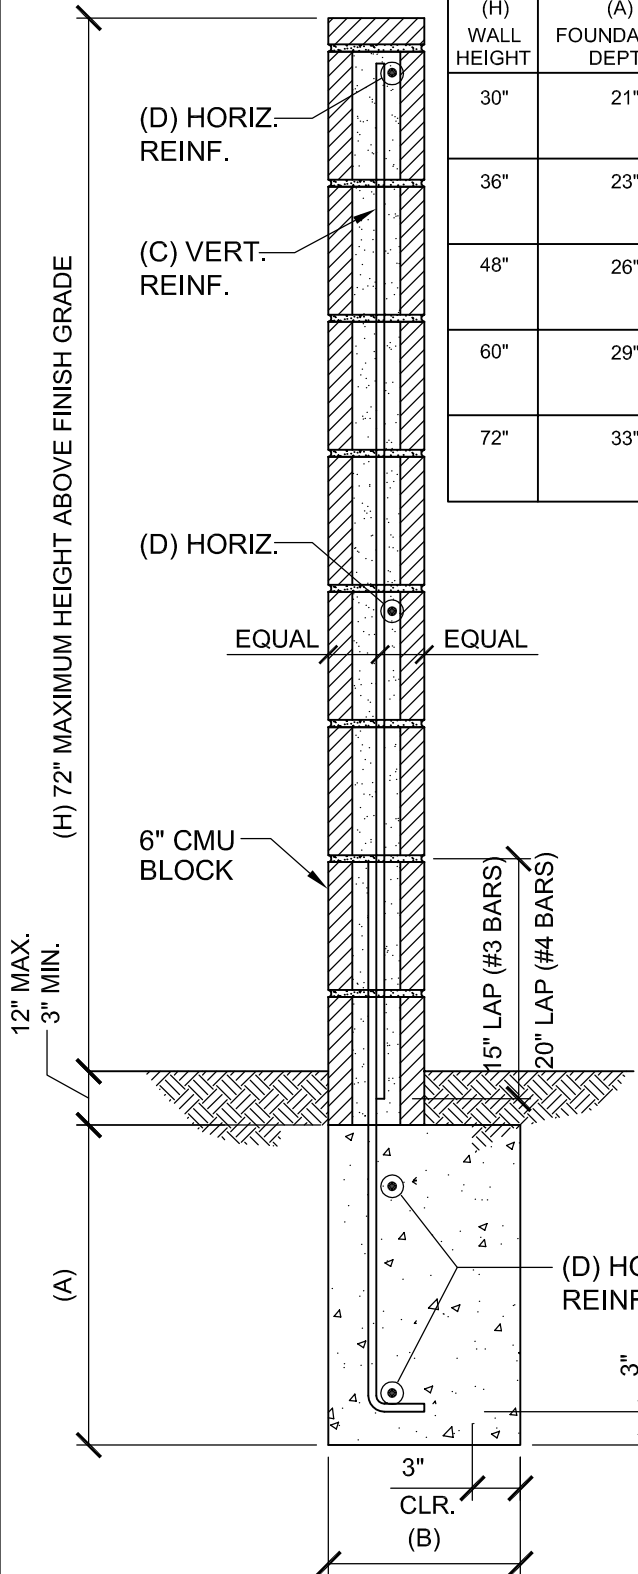

SPECIFICATIONS:

MASONRY BLOCK: Conforming to ASTM C90.  
 CONCRETE: 2,500 p.s.i. compressive strength after 28 days of curing.  
 REINFORCING: Deformed bars, conforming to ASTM A615, Grade 60.  
 GROUT: Conforming to ASTM C476 w/ minimum compressive strength of 2,000 p.s.i.  
 ANCHORS & TIES: Coppercoated or zinc-coated steel.

NOTES:

1. Foundation must be poured against undisturbed soil.
2. All cells containing reinforcing steel shall be solid grouted.
3. Foundations shall not extend above finish grade.
4. Provide alternate bends in vertical reinforcing.
5. Horizontal joints shall be level, vertical joints plumb and faces of masonry flush.
6. Neatly strike and clean off all joints in the face of walls which are not to be plastered.
7. Chipped, warped or otherwise defective masonry units shall not be used in finish work.
8. Provide "cleanouts" for grout pours > 48" high.
9. For the repair/replacement of an existing wall, the block and cap shall match the material finish and color of the existing block.
10. Updated in January 2009 Pursuant to the 2008 Los Angeles County Building Code.


The use of this standard wall detail shall be subject to field verification that these standard specifications apply. If the field conditions do not meet the constraints depicted on this standard wall detail, additional engineering plans must be submitted for review and approval.

This set of specifications MUST be kept on the job at all times and it is unlawful to make any changes or alterations on same without written permission from the Cerritos Building and Safety Division. This set of specifications SHALL NOT be held to permit or to be an approval of the violation of any provisions of any City ordinance or State law.

**City of Cerritos Standard Wall Detail "H"**  
**Non-Retaining, Free Standing Condition, Between Two Private Properties**  
**I-Footing, 30" to 72" Above Grade**

SCALE: 1" = 1'-0"


CITY OF CERRITOS  
 BUILDING AND SAFETY DIVISION  
 18125 BLOOMFIELD AVENUE  
 CERRITOS, CA 90703  
 PHONE: 562.916.1209

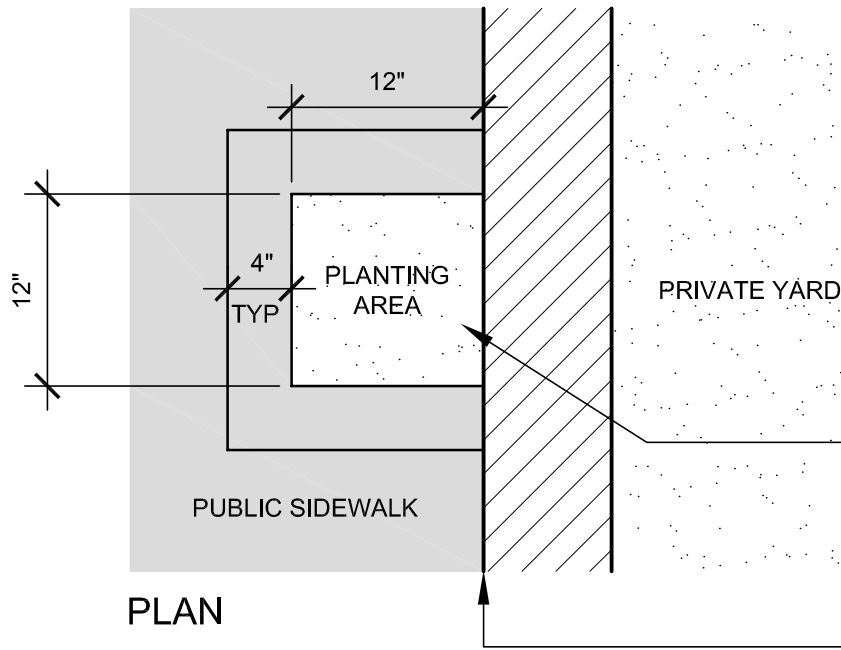

PLAN

SAWCUT AND REMOVE SQUARE PLANTING AREA IN EXISTING SIDEWALK EVERY 12 FEET OF WALL LENGTH. EDGES TO BE STRAIGHT AND FREE OF CHIPS.

PROPERTY LINE / FACE OF WALL

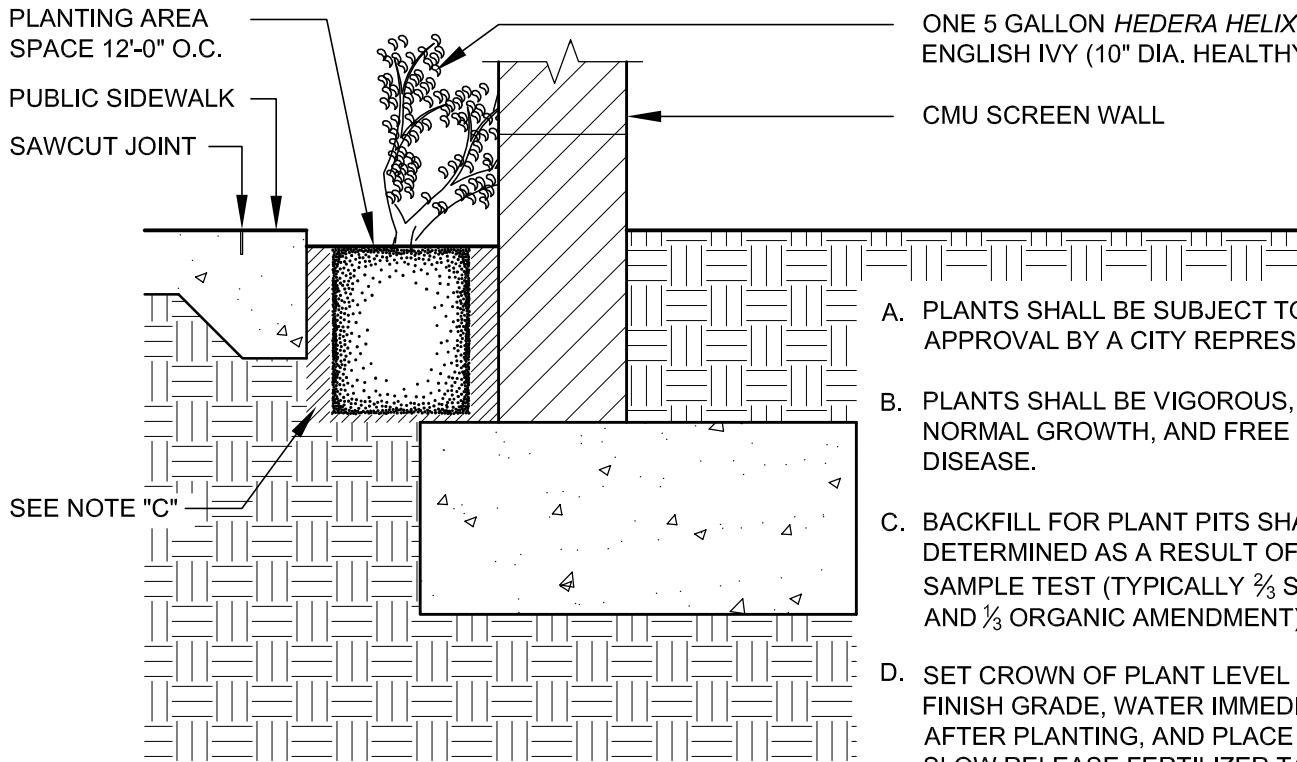

SECTION

ONE 5 GALLON *HEDERA HELIX*, ENGLISH IVY (10" DIA. HEALTHY PLANT)

CMU SCREEN WALL

- A. PLANTS SHALL BE SUBJECT TO APPROVAL BY A CITY REPRESENTATIVE.
- B. PLANTS SHALL BE VIGOROUS, OF NORMAL GROWTH, AND FREE FROM DISEASE.
- C. BACKFILL FOR PLANT PITS SHALL BE DETERMINED AS A RESULT OF A SOIL SAMPLE TEST (TYPICALLY  $\frac{2}{3}$  SITE SOIL AND  $\frac{1}{3}$  ORGANIC AMENDMENT).
- D. SET CROWN OF PLANT LEVEL WITH FINISH GRADE, WATER IMMEDIATELY AFTER PLANTING, AND PLACE ONE SLOW RELEASE FERTILIZER TABLET AT MIDPOINT OF ROOTBALL.

City of Cerritos Standard Wall Detail "V"  
Vine Planting Area

NO SCALE

CITY OF CERRITOS  
BUILDING AND SAFETY DIVISION  
18125 BLOOMFIELD AVENUE  
CERRITOS, CA 90703  
PHONE: 562.916.1209

*The page is intentionally left blank.*



**City of Cerritos**  
 18125 Bloomfield Avenue  
 Cerritos, CA 90703  
 (562) 916-1209

**Department of Community  
 Development**  
 Building and Safety Division

(For office use only)

Building Permit #: \_\_\_\_\_

Trade Permit #: \_\_\_\_\_

Parent Permit#: \_\_\_\_\_

**Building/Plumbing/Electrical/Mechanical Permit Application**

Applicant's Name: \_\_\_\_\_

Company Name (if applicable): \_\_\_\_\_

Tel. No: \_\_\_\_\_ Email: \_\_\_\_\_ Date: \_\_\_\_\_

Job Site Address: \_\_\_\_\_ Suite: \_\_\_\_\_

Work Description: \_\_\_\_\_

\_\_\_\_\_

Is this an owner-builder project?

Yes, this is an owner-builder project. As the applicant for an owner-building project, you are required to complete columns 1 and 3 of attached Declaration Form.

Is the job site address your primary residence?  Yes  No (If no, an owner-builder project is not permitted, and the owner must contract exclusively with a licensed contractor.)

No, this is not an owner-builder project. Complete columns 2 and 3 of the attached Declaration Form.

Project Valuation: \_\_\_\_\_ APN#: \_\_\_\_\_

Project Size (sq.ft.): \_\_\_\_\_ Buildings on Lot: \_\_\_\_\_ # of Stories \_\_\_\_\_

Construction Types: \_\_\_\_\_ Occupancy Groups: \_\_\_\_\_

**Type of Permit(s) Requested:**  Building  Plumbing  Electrical  Mechanical

**Owner/Business Name:** \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code: \_\_\_\_\_

Telephone Number: \_\_\_\_\_ Email: \_\_\_\_\_

**Contractor Name:** \_\_\_\_\_ **Company:** \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code: \_\_\_\_\_

Telephone Number: \_\_\_\_\_ Email: \_\_\_\_\_

License No: \_\_\_\_\_ Class: \_\_\_\_\_ Expiration Date: \_\_\_\_\_

City Business License No: \_\_\_\_\_ Expiration Date: \_\_\_\_\_

**(Please fill out attached Licensed Contractor's Declaration Form)**

**Architect/Engineer Name:** \_\_\_\_\_ **Company:** \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code: \_\_\_\_\_

Telephone Number: \_\_\_\_\_

License No: \_\_\_\_\_ Class: \_\_\_\_\_ Expiration Date: \_\_\_\_\_

# Building/Plumbing/Electrical/Mechanical Permit Application (continued)

## PLUMBING

Code	Items	Units	Code	Items	Units
03	Backwater Valves	___ Valve(s)	45	Water closet/urinal/bidet	___ Fixture(s)
05	Backflow prevention device/sprinkler	___ Device(s)	47	Water heater	___ W.H.(s)
07	Bathtubs/showers	___ Fixture(s)	49	Water treating equipment (filter, softener)	___ System(s)
11	Clothes washer (tray/standpipe)	___ Fixture(s)	51	Low pressure gas sys. (5 outlets or less)	___ System(s)
13	Dishwashers	___ Fixture(s)	52	Fee for additional outlets >5	___ Outlet(s)
15	Drinking fountain	___ Fixture(s)	53	Medium/high pressure gas system	___ System(s)
17	Floor drains	___ Fixture(s)	54	Additional fee for each outlet	___ Outlet(s)
19	Floor sinks	___ Fixture(s)	55	Gas meter (private)	___ Meter(s)
21	Hose bibbs	___ Fixture(s)	56	Gas regulator	___ Reg(s)
23	Interceptor (clarifier)	___ System(s)	60	Drainage/vent piping repair or alter	___ System(s)
25	Lavatories/sinks	___ Fixture(s)	62	Greywater system	___ System(s)
26	Miscellaneous fixture	___ Fixture(s)	63	Water piping replacement branch/fixture	___ Fixture(s)
27	Pressure regulator—prv/water	___ Device(s)	64	Other water piping < 1 1/2 inches	___ Line(s)
29	Roof drains	___ Fixture(s)	65	Other water piping 2-3 inches	___ Line(s)
35	Solar water heating system	___ System(s)	66	Other water piping > 3 inches	___ Line(s)
39	Swimming pool trap and receptor	___ System(s)			
41	Trap primer	___ System(s)			

## MECHANICAL

Code	Items	Units	Code	Items	Units
02	Refrig compressor < 100 kbtu	___ Comp(s)	31	Air inlets/outlets (area)	___ Sq. Ft.
03	Refrig compressor 101—500 kbtu	___ Comp(s)	32	Appliance vent (other)	___ Unit(s)
04	Refrig compressor > 500 kbtu	___ Comp(s)	35	Air handling unit < 2000 cfm	___ Ahu(s)
08	Furnace/heater <100 kbtu	___ Unit(s)	36	Air handling unit 2000—10000 cfm	___ Ahu(s)
09	Furnace/heater 101-500 kbtu	___ Unit(s)	37	Air handling unit > 10000 cfm	___ Ahu(s)
10	Furnace/heater > 500 kbtu	___ Unit(s)	40	Evaporative coolers	___ Unit(s)
17	Boiler < 100 kbtu	___ Boiler(s)	41	Ventilation fan (single register)	___ Fan(s)
18	Boiler 101-500 kbtu	___ Boiler(s)	42	Ventilation system (other)	___ System(s)
19	Boiler > 500 kbtu	___ Boiler(s)	43	Commercial kitchen exhaust hoods	___ Hood(s)
20	Fireplace/gas log < 100 kbtu	___ Appl(s)	44	Spray booth	___ Booth(s)
21	Fireplace/gas log 101-500 kbtu	___ Appl(s)	45	Product conveying duct system	___ System(s)
22	Fireplace/gas log > 500 kbtu	___ Appl(s)	46	Fire dampers	___ Damper(s)
30	Air inlets/outlets (each)	___ Unit(s)	47	Alteration of existing duct system	___ System(s)

## ELECTRICAL

Code	Items	Quantity	Code	Item	Quantity
B1	Residential new bldgs. Multifamily	___ Sq. Ft.			
B2	Residential new bldgs. 1 or 2 family	___ Sq. Ft.			
C1	Swimming pools, new	___ Pool(s)			
C2	Spas, hot tubs,	___ Pool(s)			
C3	Pool alterations, other type pools	___ Pool(s)			
D1	Carnival electrical rides or genrtrs	___ Unit(s)			
D2	Carnival mech rides, displays w/lgt	___ Unit(s)			
D3	Carnival booth lighting	___ Unit(s)			
E1	Temporary service, power pole	___ Pole(s)			
E2	Temporary dist system for const	___ Unit(s)			
E3	Temp pole for xmas tree lots	___ Pole(s)			
F1	Branch circuits, 120v, 15 or 20a	___ Ckt(s)			
F2	Branch circuits, lighting, 208-277v	___ Ckt(s)			
G1	Outlets-lighting, recept, switch	___ Outlet(s)			
G2	Lighting fixtures	___ Lgt Ftx(s)			
G3	Pole mounting light fixtures	___ Pole Fxt(s)			
G4	Theatrical-type lgt fixtures	___ Lgt Ftx(s)			
<b>Residential Appliances Less Than 3hp</b>					
HA	Forced air units (FAU)	___ Appl(s)			
H1	Electrical ovens	___ Appl(s)			
H2	Garbage disposals	___ Appl(s)			
H3	Dishwashers	___ Appl(s)			
H4	Range hoods	___ Appl(s)			
H5	Washing machines	___ Appl(s)			
H7	Exhaust fans	___ Appl(s)			
H9	Other residential less than 3hp	___ Appl(s)			
<b>Non Residential Appliances Less Than 3hp</b>					
1A	Exhaust fans	___ Appl(s)			
1B	Electric water heaters	___ Appl(s)			
1C	Lighted showcases	___ Appl(s)			
1D	Electric drinking fountains	___ Appl(s)			
1E	Vending machines	___ Appl(s)			
1F	Laundry machines	___ Appl(s)			
J5	Other non-res less than 3hp	___ Appl(s)			
<b>Electric Signs</b>					
K1	Signs, outline lgt, one ckt	___ Sign(s)			
K2	Additnl, ckt within the same sign	___ Sign(s)			
<b>Power Equipment Over 3hp and Less Than 10hp</b>					
JA	Heat pumps	___ Appl(s)			
JB	AC units	___ Appl(s)			
JD	Battery chargers	___ Appl(s)			
JE	Electric water heaters	___ Appl(s)			
JF	Refrigeration cabinets	___ Appl(s)			
JG	Electric cooking equipment	___ Appl(s)			
JH	Electric heaters	___ Appl(s)			
JI	Electric generators	___ Appl(s)			
J6	Other equipment > 3hp—<10hp	___ Appl(s)			
<b>Special Electrical Items</b>					
P2	PC residential photo voltaic<10kw	___			
P3	Inverter res photo volt <10kw	___			
P4	PC residential photo volt >10kw<50kw	___			
P5	Inverter res photo volt >10kw<50kw	___			
V2	<=10kw electric vehicle supply equip	___ #Units			
V3	>10kw electric vehicle suppl equip	___ #Units			
V4	Fast electric vehicle suppl equip	___ #Units			
<b>Transformers</b>					
JM	Transformers, <3kva	___ Xfmr(s)			
JN	Transformers, 15kva	___ Xfmr(s)			
JO	Transformers, 25kva	___ Xfmr(s)			
JQ	Transformers, 37.5kva	___ Xfmr(s)			
JR	Transformers, 45kva	___ Xfmr(s)			
JS	Transformers, 50kva	___ Xfmr(s)			
JT	Transformers, 75kva	___ Xfmr(s)			
JU	Transformers, 112.5kva	___ Xfmr(s)			
JV	Transformers, 150kva	___ Xfmr(s)			
JW	Transformers, 225kva	___ Xfmr(s)			
<b>Motors</b>					
JX	Motors, <3hp	___ Mtr(s)			
JY	Motors, 5hp	___ Mtr(s)			
JZ	Motors, 10hp	___ Mtr(s)			
J0	Motors, 15hp	___ Mtr(s)			
J1	Motors, 20hp	___ Mtr(s)			
J2	Motors, 25hp	___ Mtr(s)			
J3	Motors, 50hp	___ Mtr(s)			
J4	Motors, 100hp	___ Mtr(s)			
<b>Other Power Equipment</b>					
J7	Pwr eq w/rating > 10hp to <50hp	___ Pwr			
J8	Pwr eq w/rating > 50hp to <100hp	___ Pwr			
J9	Pwr eq w/rating > 100hp	___ Pwr			
<b>Services, Panels, Control Panels, Mcc's</b>					
LA	100a panels, services, mcc's	___ Pnl(s)			
LB	200a panels, services, mcc's	___ Pnl(s)			
LC	225a panels, services, mcc's	___ Pnl(s)			
LD	400a panels, services, mcc's	___ Pnl(s)			
LE	600a panels, services, mcc's	___ Pnl(s)			
LF	800a panels, services, mcc's	___ Pnl(s)			
LG	1000a panels, services, mcc's	___ Pnl(s)			
LH	1200a panels, services, mcc's	___ Pnl(s)			
LI	1600a panels, services, mcc's	___ Pnl(s)			
LJ	2000a panels, services, mcc's	___ Pnl(s)			
LL	3000a panels, services, mcc's	___ Pnl(s)			
LM	High voltage panels (over 600v)	___ Pnl(s)			
LN	Other panels, 0 to 399 amps	___ Pnl(s)			
LO	Other panels, 400 to 1000 amps	___ Pnl(s)			
LP	Other panels, >1000 amps	___ Pnl(s)			
W1	Cable trays, busways (length)	___ Feet			
M1	Misc conduits & conductors	___ Unit(s)			
P1	Haz locations >2000 sf total	___ Haz			
R1	Report review fee, # of equip	___ Eq			
R2	High voltage report fee, #equip	___ HV Eq			



JOB ADDRESS
LOCALITY

**COLUMN 1**

**OWNER-BUILDER DECLARATION**

I hereby affirm under penalty of perjury that I am exempt from the Contractors' State License Law for the reason(s) indicated below by the checkmark(s) I have placed next to the applicable item(s) (Section 7031.5, Business and Professions Code): Any city or county that requires a permit to construct, alter, improve, demolish, or repair any structure, prior to its issuance, also requires the applicant for the permit to file a signed statement that he or she is licensed pursuant to the provisions of the Contractors' State License Law (Chapter 9 (commencing with Section 7000) of Division 3 of the Business and Professions Code) or that he or she is exempt from licensure and the basis for the alleged exemption. Any violation of Section 7031.5 by any applicant for a permit subjects the applicant to a civil penalty of not more than five hundred dollars (\$500.)

() I, as owner of the property, or my employees with wages as their sole compensation, will do () all of or () portions of the work, and the structure is not intended or offered for sale (Section 7044, Business and Professions Code: The Contractors' State License Law does not apply to an owner of property who, through employees' or personal effort, builds or improves the property, provided that the improvements are not intended or offered for sale. If, however, the building or improvement is sold within one year of completion, the Owner-Builder will have the burden of proving that it was not built or improved for the purpose of sale.)

() I, as owner of the property, am exclusively contracting with licensed Contractors to construct the project (Section 7044, Business and Professions Code. The Contractor's State License Law does not apply to an owner of property who builds or improves thereon, and who contractors for the projects with a license Contractor pursuant to the Contractors' State License Law.)

() I am exempt from licensure under the Contractors' State License Law for the following reason:

\_\_\_\_\_

By my signature below I acknowledge that, except for my personal residence in which I must have resided for at least one year prior to completion of the improvements covered by this permit, I cannot legally sell a structure that I have built as an owner-builder if it has not been constructed in its entirety by licensed contractors. I understand that a copy of the applicable law, Section 7044 of the Business and Professions Code, is available upon request when this application is submitted or at the following Web site: <http://www.leginfo.ca.gov/calaw.html>.

Date: \_\_\_\_\_

\_\_\_\_\_  
Signature of Property Owner or Authorized Agent

**COLUMN 2**

**LICENSED CONTRACTOR'S DECLARATION**

I hereby affirm under penalty of perjury that I am licensed under provisions of Chapter 9 (commencing with Section 7000) of Division 3 of the Business and Professions Code, and my license is in full force and effect.

License Class \_\_\_\_\_ License No. \_\_\_\_\_

Date \_\_\_\_\_ Contractor Signature \_\_\_\_\_

**WORKERS' COMPENSATION DECLARATION**

**WARNING: FAILURE TO SECURE WORKER'S COMPENSATION COVERAGE IS UNLAWFUL AND SHALL SUBJECT AN EMPLOYER TO CRIMINAL PENALTIES AND CIVIL FINES UP TO ONE HUNDRED THOUSAND DOLLARS (\$100,000), IN ADDITION TO THE COST OF COMPENSATION, DAMAGES ARE PROVIDED FOR IN SECTION 3706 OF THE LABOR CODE, INTEREST, AND ATTORNEY'S FEES.**

I hereby affirm under penalty of perjury one of the following declarations:

I have and will maintain a certificate of consent to self-insure for workers' compensation, issued by the Director of Industrial Relations as provided for by Section 3700 of the Labor Code, for the performance of the work for which this permit is issued.

Policy No. \_\_\_\_\_

I have and will maintain workers' compensation insurance, as required by Section 3700 of the Labor Code, for the performance of the work for which this permit is issued. My workers' compensation insurance carrier and policy number are:

Carrier	Policy Number	Expiration Date
_____	_____	_____

Name of Agent	Phone Number
_____	_____

I certify that, in the performance of the work for which this permit is issued, I shall not employ any person in any manner so as to become subject to the workers' compensation laws of California, and agree that, if I should become subject to the workers' compensation provisions of Section 3700 of the Labor Code, I shall forthwith comply with those provisions

\_\_\_\_\_  
Signature of Applicant

\_\_\_\_\_  
Date

**COLUMN 3**

**HAZARDOUS MATERIAL DECLARATION**

Will the applicant or future building occupant handle a hazardous material or a mixture containing a hazardous material equal to or greater than the amount specified on the hazardous material information guide?

Yes  No

Will the intended use of the building by the applicant or future building occupant require a permit for construction or modification from the South Coast Air Quality Management District (SCAQMD)? See permitting checklist for guidelines.

Yes  No

I have read the hazardous materials information guide and the SCAQMD permitting checklist. I understand my requirements under the Los Angeles County Code Title 2, Chapter 220 Sections 220.100 through 220.140 concerning hazardous material reporting and for obtaining a permit from the SCAQMD.

**ASBESTOS NOTIFICATION**

Notification letter sent to SCAQMD or EPA

I declare that notification of asbestos removal is not applicable to addressed project.

**DECLARATION REGARDING CONSTRUCTION LENDING AGENCY**

I hereby affirm under penalty of perjury that there is a Construction lending agency for the performance of the work for which this permit is issued (Section 3097, Civil Code)

\_\_\_\_\_  
Lender's Name

\_\_\_\_\_  
Lender's Address

By my signature below, I certify to each of the following:  
I am the property owner or authorized to act on the property owner's behalf.

I have read this application and the information I have provided is correct.

I agree to comply with all applicable city and county ordinances and state laws relating to building construction.

I authorize representatives of this county to enter the above-identified property for inspection purposes.

\_\_\_\_\_  
Signature of Property Owner or Authorized Agent

\_\_\_\_\_  
Date